



## Airomatic PS4000

This type of universal awning is equally suitable for horizontal, sloping and vertical surfaces.


Suitable for small sized surfaces.

Permanent high fabric tension with integrated gas pressure mechanism in the side guides

Always equipped with a cassette.

To support the fabric, installations with a projection of 3M require one and installations with a projection of more than 3.5M require two fabric support tubes.

Total width = rafter centres + 28

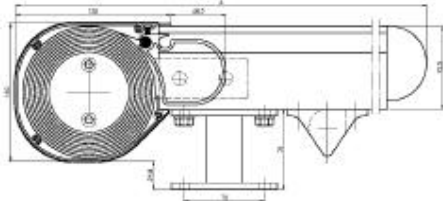

Width 850mm min 4000mm max

Proj 1000mm min 4000mm max



## Airomatic PS4500

Exterior sun protection for conservatories and glass roofs. For horizontal, sloping and vertical surfaces.

Suitable for middle size surfaces.


Permanent high fabric tension with integrated gas pressure mechanism in the side guides

To support the fabric, installations with a projection of more than 3M require one and installations with a projection of more than 5M require two fabric support tubes.

Total width = rafter centres + 45

Width 850mm min 5500mm max

Proj 1000mm min 6000mm max

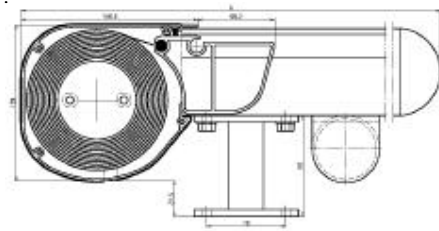

## Targa PS5000

Exterior sun protection for conservatories and glass roofs. For horizontal, sloping and vertical surfaces.

Suitable for large size surfaces.

Permanent high fabric tension with integrated gas pressure mechanism in the side guides

To support the fabric, installations with a projection of more than 3M require one and installations with a projection of more than 6M require two fabric support tubes.

Total width = rafter centres + 45

Width 850mm min 5500mm max

Proj 1000mm min 6000mm max

